

6 to 24GHz – High Pass Filter

Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Support one year standard warranty.

RF Characteristics

Model Number	Pass Band (GHz)	Insertion Loss Max	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYHPF3223A6T24SF	6.0~24.0	2.0dB @6.0~6.3GHz 1.0dB @6.3~24GHz	1.5@6~20GHz 1.8@20~24GHz	60dB @DC~5.4GHz	15	SMA-F	-55 ~ +85

- ² Listed are specific frequency ranges and tailor-made ranges are available.
² Please provide the below information when inquiring and mark * is required.
- * 1. The specific pass band frequency range
 - * 2. The specific rejection and frequency
 - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

Mechanical Drawing

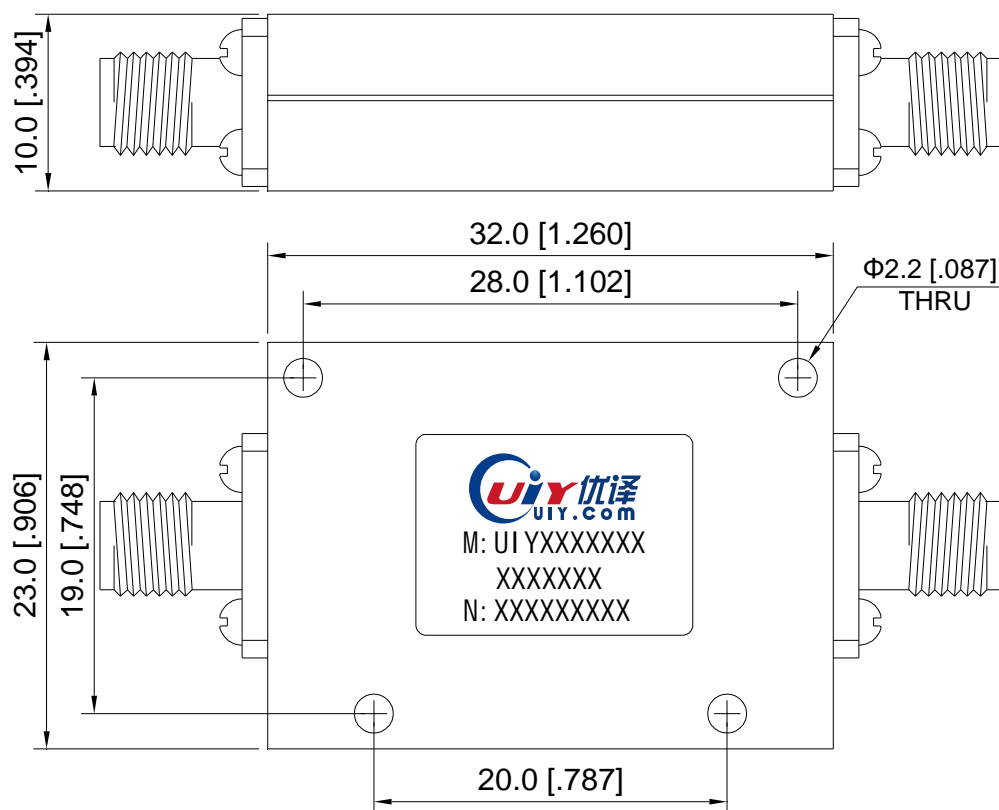

Unit: mm/ inch, General part tolerance is $\pm 2\%$ unless otherwise stated.

Ver. 5.0